

TUMBLE DRYERS

DESIGNED TO MEET ALL NEEDS

DD11 SILVER/BRONZE
DD16 SILVER/BRONZE

FEATURES

- Construction in grey skinplate, stainless steel look.
- Big loading door (opening of 180°).
- Direct drive through a gearbox, no pulley.
- **DD BRONZE range:** Analogic control with time and temperature selection. Light indication of heating. (These models do not allow the moisture control option).
- **DD SILVER range:** Electronic control. Easy and intuitive to use, the electronic control offers a complete control of the process.
- REVERSING DRUM: All models offer the reverse turning of the drum.
- STAINLESS STEEL DRUM standard.
- DOUBLE FLOW: Mixed axial-radial airflow to optimise and maximise the airflow circuit in the drum.
- GENTLE DRY: The new drum with stamped holes makes sure the linen is gently handled.
- New filter drawer with wide surface and improved airflow.
- Cool Down: Anti-wrinkle at the end of cycle.
- Models available in electric, gas or steam heating.
- **Self-Service:** SILVER range have several payment options for Laundromats: to work with centralized payment systems, with coin / token, or with prepay card systems. Electric and gas heated models.




OPTIONS

- CARE DRY: Intelligent Moisture Control. (SILVER range).
- SPRINKLER: Integrated Fire Extinguishing System. (SILVER range).
- Double doorglass.
- Stainless steel body.
- Stainless steel front panel.
- Low pressure steam battery.
- Model versions in 60 Hz.
- Marine versions 440V III 50/60 Hz No neutral or 480V III 50/60 Hz No neutral.



TECHNICAL DATA	UNIT.	DD11 SILVER/BRONZE	DD16 SILVER/BRONZE		
CAPACITY					
Capacity 1/18	Kg	12	18		
Capacity 1/20	Kg	11	17		
Hourly Output SILVER/BRONZE	Kg/h	21	33		
Evaporation capacity SILVER/BRONZE	l/h	10,9	17,2		
DRUM					
Ø Drum	mm	750	750		
Ø Door	mm	574	574		
Door center height	mm	976	976		
Load hole bottom height	mm	689	689		
Drum length	mm	475	746		
Drum volume	l	210	330		
POWER					
Drum motor power	Kw	0,25	0,25		
Fan Motor Power SILVER/BRONZE	Kw	0,25	0,25		
Total Installed power SILVER/BRONZE	Kw	12,55	18,55		
Electric Heating (Installed power)	Kw	12	18		
Gas heating (installed Power) in KW	Kw	20,51	20,51		
Gas heating (installed el. power) SILVER/BRONZE	Kw	0,55	0,55		
Steam heating (Steam Power KW)	Kw	30	30		
Steam heating (installed el. power) SILVER/BRONZE	Kw	0,55	0,55		
CONNECTIONS					
		ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS
Tension 230V - I + T	N° x mm2 / A	3 x 35 / 63A	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	N° x mm2 / A	4 x 10 / 40A	4 x 1,5 / 20A	4 x 16 / 63A	4 x 1,5 / 20A
Tension 400V - III + N + T	N° x mm2 / A	5 x 4 / 25A	5 x 1,5 / 20A	5 x 10 / 32A	5 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
Ø Steam inlet	BSP	3/4"		3/4"	
Ø Condensed (Steam models)	BSP	3/4"		3/4"	
DIMENSIONS / PACKING DIMENSIONS					
Width / Width	mm	785 / 865		785 / 865	
Depth / Depth	mm	840 / 940		1110 / 1210	
Height / Height	mm	1694 / 1840		1694 / 1840	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	172 / 180		187 / 200	
OTHERS					
Max airflow SILVER/BRONZE	m3/h	850		850	
Ø Fume exhaust	mm	200		200	
Noise level SILVER/BRONZE	dB	64		64	

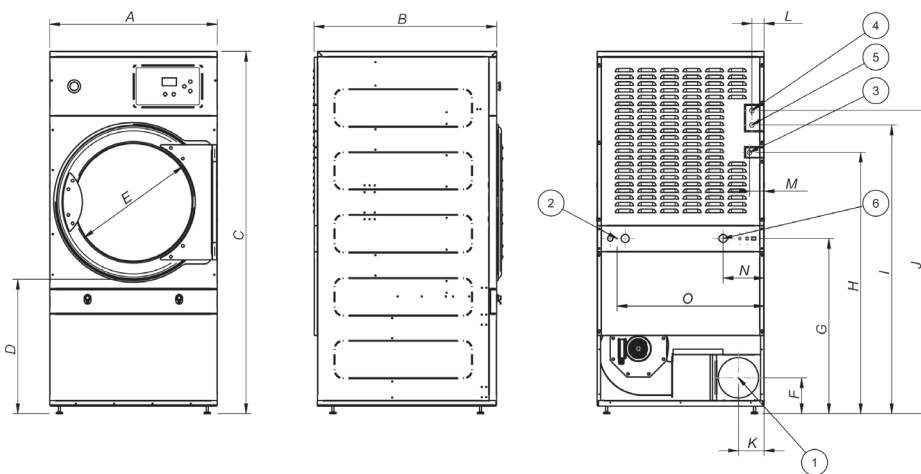

- 01. Fumes outlet
- 02. Electrical connection
- 03. Gas connection
- 04. Steam connection
- 05. Condensation outlet
- 06. Anti fire water valve

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
DD11	785	840	1700	618	574	168	821	1226	1354	1422	121	56	68	192	690
DD16	785	1010	1700	618	574	168	821	1226	1354	1422	121	56	68	192	690