



Thinking of you
Electrolux

PROFESSIONAL LAUNDRY

Super "S" 200G Washer

W5180S – 45 lb

Features and benefits

- **Compass Pro® microprocessor offers:**
 - Large display and one control knob for easy program selection
 - Language selection
 - Real time clock for time of day pricing
 - Quick selection and option buttons for the most frequently used wash programs and options
- **AWS – Automatic Water Savings:**
 - Save up to 30% on water with AWS – automatically. With every wash cycle, AWS determines the actual weight of the load and adds precisely the right amount of water, significantly reducing water consumption and energy costs
- Extremely low water and energy consumption
- Four compartment detergent box for manual dosing of powder or liquid detergent
- High extraction force for efficient de-watering
- Door with gasket and strong hinges built for heavy duty operation
- Stainless and galvanized steel in all vital parts for high degree of rust protection
- SuperBalance guarantees the correct extraction force
- Sanitizing Rinse for greater customer satisfaction
- Single phase electrical for easy installation & lower costs



Coin, card ready, & OPL models available.

Images shown are a representation of the product only and variations may occur.

Main options

- Automatic liquid detergent supply (optional I/O board)
- Stainless steel front panel
- Unique text messaging option
- Voice guidance option

Main specifications				W5180S			
Max. capacity	filling factor 1:9	kg/lb		20/45			
Drum, volume		litre/ft ³		180/6.4			
	diameter	ø mm/inch		650 / 25 9/16			
Extraction		rpm		742			
G-factor				200			
Standard heating alternatives		electricity	kW	-			
		steam		x			
		non-heated		x			
Modified energy factor****				2.03			
Water factor****				6.1			
Consumption data 6S03/6L33				EI		Steam***	
"Warm" *				Full load, 20 kg / 45 lb	Half load**, 10 kg / 22.5 lb	Full load, 20 kg / 45 lb	Half load**, 10 kg / 22.5 lb
Total time		min		29	27	29	27
Water consumption (cold+hot)		litre/gallon		153/40 + 13/3	83/22 + 8/2	153/40 + 13/3	83/22 + 8/2
Energy consumption (motor/heating/hot water)		kWh		0.20/1.35/0.9	0.15/0.7/0.5	0.20/-	0.15/-
Steam consumption		kg/lbs		-	-	3.4/7.5	1.8/4.0
Residual moisture		%		61	68	61	68

* Water temperature 59°F cold water and 149°F hot water.

** Programs with AWS.

*** Depending on steam pressure.

**** The figures are based on theoretical calculations and not lab tests, with AWS program.


Certified in accordance with ISO 9001 and ISO 14001 and approved IP 24D. Certified in accordance with UL/ETL standards.




Thinking of you
Electrolux

Electrical connections*					
Heating alternative	Main voltage		Heating power kW	Total power kW	Recommended ITCB A
		Hz			
Electric heated	208-240V 1 ~	60	13.0	13.5	80
	208-240V 3 ~	60	13.0	13.3	50
	440/480V 3 ~	60	13.0	13.3	25
Steam or Non heated	120-480V 1/3 ~	60	-	1.0	15


Water and steam connection		W5180S	
Water valves	DN/inch	20 / 3/4	
Water pressure	psi	30-90	
Capacity at 300 kPa	l/min	30	
Drain valve	ø mm/inch	75 / 3	
Draining capacity	l/min	170	
Steam valve	DN/inch	15 / 1/2	
Steam pressure	psi	40-90	
Liquid detergent supplies		5	
Floor requirements			
Frequency of the dynamic force	Hz	12.4	
Floor load at max extraction	kN	3.0 ± 4.8	
Sound levels			
Sound power level (IEC 60704-2-4)			
wash	dB(A)	70	
extraction	dB(A)	74	
Heat emission			
% of installed power, max		5	
Shipping data			
Weight	net, kg/lbs	228 / 502.7	
	crated, kg/lbs	240 / 529.1	
Shipping volume	m ³ /ft ³	1.18 / 41.7	
Accessories			
Steel base		x	
Hose kits for water or steam		x	
Fluff collector		x	
Dimensions in mm/inch			
A	Width	750 / 29 1/2	
B	Depth	880 / 34 5/8	
C	Height	1333 / 52 1/2	
D		435 / 17 1/8	
E		915 / 36	
F		1035 / 40 3/4	
G		45 / 1 3/4	
H		1245 / 49	
I		295 / 11 5/8	
J		210 / 8 1/4	
K		1225 / 48 1/4	
L		1040 / 40 15/16	
M		325 / 12 13/16	
N		100 / 3 15/16	
O		225 / 8 7/8	
		130 / 5 1/8	
1	Operating panel	6	Water re-use
2	Door opening ø 395 mm / 15 9/16 inch	7	Drain
3	Detergent box	8	Liquid detergent supply
4	Cold water	9	Electrical connection
5	Hot water	10	Steam connection

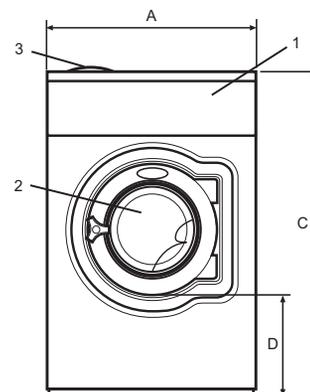

Front

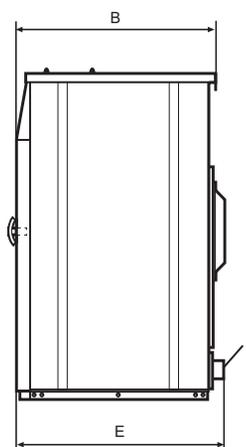

Side view

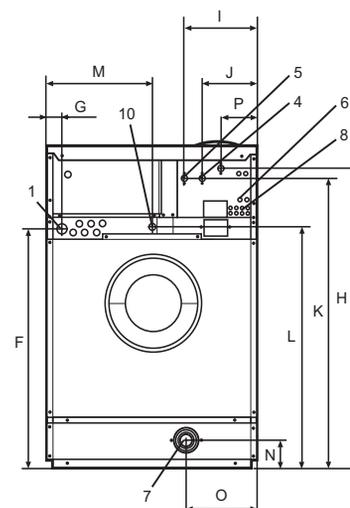

Rear

Front and side panels in light grey and blue (RAL 260 70 05, 250 60 30)

* Other voltages available, see installation manual

Art. No. 438919505US/2013.05.03
We reserve the right to alter specifications without notice.

For Electrolux Professional Laundry Solutions in North America, please contact:

Laundrylux
461 Doughty Boulevard • Inwood, NY 11097-1384
(800) 381-7222 • info@laundrylux.com
www.laundrylux.com

www.electroluxusa.com/laundrysystems

Share more of our thinking at www.electrolux.com