

HIGH SPIN WASHER

THE MOST EFFICIENT FOR THE MOST DEMANDING CUSTOMERS

WED 11 ET
WED 14 ET
WED 18 ET

FEATURES

- High spin washer extractor. No need to be anchored to the floor.
- G Force 450.
- Body, drum and tub in stainless steel.
- Detergent dispenser with 4 compartments.
- 8 signals for automatic liquid dosing, programmable in time and delay.
- 3 water inlets.
- These machines have electronic control of imbalance with frequency inverter, that detects the unbalanced load before spinning. Standard frequency: 50 - 60 Hz.
- New microprocessor EASY TOUCH with touch screen. 26 preset programs.
- Possibility of programming, exporting and importing programs without limit, software updates, through USB port, using USB drive.
- Traceability standard: All washing process (temperatures, water levels) is stored in the washer and can be extracted to a PC by means of a USB drive.
- Wet Cleaning standard in the microprocessor: fully adjustable water levels and washing speed for delicate.
- Optimal loading standard to optimize water and chemicals consumptions.
- LOADING AID feature with water and rotation control for easy loading of the linen.
- Self-service version available by installing a central pay or coin meter on the standard model.
- CE, WRAS and GOST approved product. Optional version for ETL certified product.



OPTIONS

- Double drain kit, allow the recovery of the water, with important water savings. For models WED14 and WED18.
- Leveling feet.
- Drain pump kit for models WED11 and WED14.
- Bottom cover and plinth for loading height 850 mm from door bottom.
- Bottom cover and plinth for having same height in washers.
- Relay card with 6 extra dosing signals: total of 14 signals in the machine.
- Weighing System. Weighing sensor system on feet.
- Steam kit to transform an electric or hot water heated machine into steam version.
- Self-service kits: Coiner + box, new token kit + box, central pay kit, delayed door opening in case of power outage.
- Ship voltage for electric models: 440V III 50/60 Hz No neutral.



Easy touch



Inox



Eau chaude et Eau froide



Inverter



3 arrivées d'eau



Charge optimale



Installation et maintenance aisées



Tambour efficace




Wet cleaning



Pesage

TECHNICAL DATA	UNIT.	WED11 ET	WED14 ET	WED18 ET						
DRUM										
Load capacity 1:9 / 1:10	Kg	11/10	14/13	20/18						
Volume	l	100	130	180						
Diameter	mm	532	620	700						
Depth	mm	425	430	470						
GENERAL DETAILS										
Washing speed / Spining speed	r.p.m.	50/ 1.245	50/ 1.150	47/ 1.080						
G Factor	-	450	450	450						
Maximum force transmitted	KN	2,3 ±0,2	2,5 ±1,05	3,6 ±1,4						
Frequency-dynamic force	Hz	16,7	16,7	16						
Sound level	dB	70	70	70						
Self-service version	-	Yes	Yes	Yes						
Double drain	-	No	Opt	Opt						
Weighing System / Tilting System	-	Opt/No	Opt/No	Opt/No						
DOOR										
Height center door / Height door	mm	625/415	700/440	750/510						
Diameter	mm	290	373	373						
POWER										
Motor	kW	0,75	1,5	2,2						
Heating (Electric model)	kW	6	9	12						
Max. power (Electric model)	kW	6,25	9,5	12,75						
Max. power (steam and hot water)	kW	0,75	1,5	2,2						
CONNECTIONS										
		ELECTRICAL	STEAM / HOT WATER	ELECTRICAL	STEAM / HOT WATER	ELECTRICAL	STEAM / HOT WATER			
Tension 230V - I + N + T	N° x mm2 / A	3 x 4 / 32A	3 x 1,5 / 6A	3 x 10 / 50A	3 x 1,5 / 10A	3 x 16 / 63A	3 x 1,5 / 10A			
Tension 230V - III + T	N° x mm2 / A	4 x 2,5 / 20A	-	4 x 4 / 25A	-	4 x 6 / 40A	-			
Tension 400V - III + N + T	N° x mm2 / A	5 x 1,5 / 10A	-	5 x 1,5 / 16A	-	5 x 2,5 / 20A	-			
Steam inlet (Steam mod.)	inch	1/2"		1/2"		1/2"				
Maximum steam consumption (Steam mod.)	Kg/h	7		8,5		12				
Water inlet	inch	3/4"		3/4"		3/4"				
Water main pressure	Kgs/cm ²	2-4		2-4		2-4				
Maximum water consumption*	Lit/h	71,4		88,8		118,3				
Drain	mm/inch	3"		3"		3"				
Drainage capacity	Lit/min	200		200		200				
DIMENSIONS / PACKING DIMENSIONS										
Width / Width	mm	692/750			788/860			884/960		
Depth / Depth	mm	788/1.000			869/1.000			913/1.050		
Height / Height	mm	1.158/1.420			1.307/1.570			1.415/1.700		
Net weight / Gross weight	kg	212/240			254/288			348/386		

* N°20 Program, 75% load

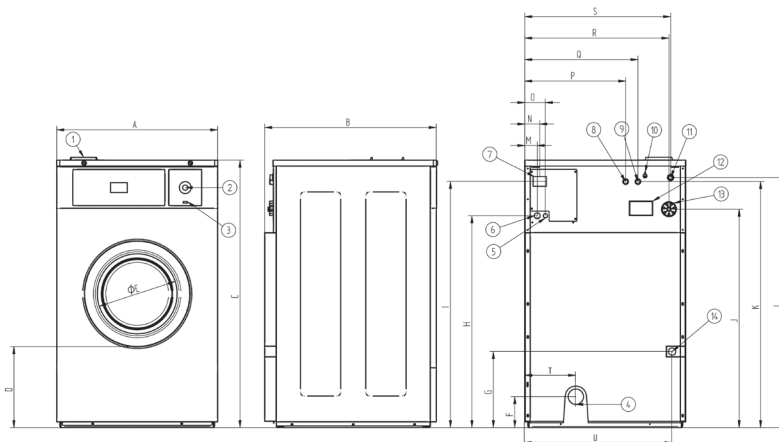

01. Soap dispenser
02. Emergency stop
03. Usb port
04. Drain
05. Electric connection to liquid soap pumps
06. Electrical connection
07. Main switch
08. Auxiliar water inlet
09. Hot water inlet
10. Ground connection
11. Cold water inlet
12. Blur output / water overload
13. Liquid soap connection
14. Steam connection

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U
WED11	692	788	1.158	408	290	93	355	886	1.055	940	1.053	1.073	61	74	101	413	468	610	623	252	626
WED14	788	869	1.307	427	373	130	385	1.035	1.203	1.067	1.202	1.222	61	74	101	494	554	706	714	243	718
WED18	884	913	1.415	490	373	99	390	1.143	1.207	1.166	1.331	1.331	61	74	101	437	517	769	810	355	833