

## HIGH SPIN WASHER THE MOST EFFICIENT FOR THE MOST DEMANDING CUSTOMERS

WED 27 ET WED 36 ET

## **FEATURES**

- High spin washer extractor. No need to be anchored to the floor.
- G Force 450.
- Body, drum and tub in stainless steel.
- Detergent dispenser with 4 compartments.
- 8 signals for automatic liquid dosing, programmable in time and delay.
- 3 water inlets.
- These machines have electronic control of imbalance with frequency inverter, that detects the unbalanced load before spinning. Standard frequency: 50 - 60 Hz.
- New microprocessor EASY TOUCH with touch screen. 26 preset programs.
- Possibility of programming, exporting and importing programs without limit, software updates, through USB port, using USB drive
- Traceability standard: All washing process (temperatures, water levels) is stored in the washer and can be extracted to a PC by means of a USB drive.
- Wet Cleaning standard in the microprocessor: fully adjustable water levels and washing speed for delicate.
- Optimal loading standard to optimize water and chemicals consumptions.
- LOADING AID feature with water and rotation control for easy loading of the linen.
- Self-service version available by installing a central pay or coin meter on the standard model.
- CE, WRAS and GOST approved product. Optional version for ETL certified product.



## **OPTIONS**

- Double drain kit, allow the recovery of the water, with important water savings.
- Leveling feet.
- Bottom cover and plinth for loading height 850 mm from door bottom. Model WED27.
- Bottom cover and plinth for having same height in washers. Model WED27.
- Relay card with 6 extra dosing signals: total of 14 signals in the machine.
- Weighing System. Weighing sensor system on feet.
- Steam kit to transform an electric or hot water heated machine into steam version.
- Self-service kits: Coiner + box, new token kit + box, central pay kit, delayed door opening in case of power outage.
- Voltage 230 V III 50/60 Hz. Model WED36.
- Ship voltage for electric models: 440V III 50/60 Hz No neutral.






















TECHNICAL DATA	UNIT.	WED	27 ET	WED	WED36 ET					
DRUM										
Load capacity 1:9 / 1:10	Kg	28,	/25	39/35						
Volume	I	25	50	350						
Diameter	mm	77	70	860						
Depth	mm	50	30	602						
GENERAL DETAILS										
Washing speed / Spining speed	r.p.m.	45/1	.035	42,5/975						
G Factor	-	4.	50	450						
Maximum force transmitted	KN	4,9 :	±1,75	7,5 ±2,45						
Frequency-dynamic force	Hz	1	5	14,3						
Sound level	dB	7	0	70						
Self-service version	-	Y	es	Yes						
Double drain	-	0	)pt	Opt						
Weighing System / Tilting System	-	Opt	/No	Opt/No						
DOOR										
Height center door / Height door	mm	865,	/600	885/540						
Diameter	mm	37	73	560						
POWER										
Motor	kW	(	3	4						
Heating (Electric model)	kW	1	8	21						
Max. power (Electric model)	kW	1	9	22						
Max. power (steam and hot water)	kW	(	3	4						
CONEXIONES		ELECTRICAL	STEAM / HOT WATER	ELECTRICAL	STEAM / HOT WATER					
Tension 230V-I + N +T	N° x mm2 / A	3 x 25 / 100A	3 x 1,5 / 16A	-	-					
Tension 230V - III + T	N° x mm2 / A	4 x 10 / 50A	-	4 x 25 / 100A	4 x 1,5 / 6A					
Tension 400V - III + N + T	N° x mm2 / A	5 x 4 / 32A	-	5 x 16 / 63A	5 x 1,5 / 16A					
Steam inlet (Steam mod.)	inch	3/	′4″	3/4"						
Maximum steam consumption (Steam mod.)	Kg/h	1	5	18						
Water inlet	inch	3/	′4″	3/4"						
Water main pressure	Kgs/cm <sup>2</sup>	2	-4	2-4						
Maximum water consumption*	Lit/h	17:	5,5	261,3						
Drain	mm/inch	3	)"	3″						
Drainage capacity	Lit/min	20	00	200						
DIMENSIONS / PACKING DIMENSIONS										
Width / Width	mm	979/	1.060	1.095/1.190						
Depth / Depth	mm	1.041,	/1.180	1.184/1.250						
Height / Height	mm	1.553,	/1.810	1.598/1.870						
Net weight / Gross weight	kg	502,	/548	762/818						

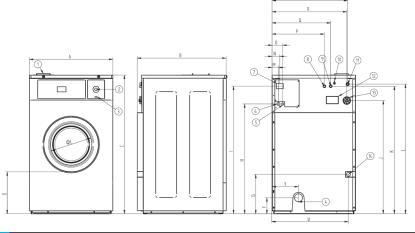

- \* N°20 Program, 75% load
- 01. Soap dispenser
- 02. Emergency stop 03. Usb port 04. Drain

- 05. Electric connection to liquid soap pumps 06. Electrical connection
- 07. Main switch
- 08. Auxiliar water inlet
- 09. Hot water inlet
- 10. Ground connection11. Cold water inlet
- 12. Blur output / water overload13. Liquid soap connection
- 14. Steam connection

	Α	В	С	D	E	F	G	Н	- 1	J	K	L	M	N	0	P	Q	R	S	T	U
WED27	979	1.041	1.553	610	373	130	532	1.279	1.343	1.282	1.462	1.462	61	74	101	506	586	864	906	367	909
WED36	1.095	1.184	1.598	522	560	155	990	1.326	1.494	1.344	1.509	1.509	61	74	101	621	701	979	1.021	384	1.024







