

HIGH SPIN WASHER

THE MOST EFFICIENT FOR THE MOST DEMANDING CUSTOMERS

WED 45 ET
WED 60 ET
WED 120 ET

FEATURES

- High spin washer extractor. No need to be anchored to the floor.
- G Force 350.
- Body, drum and tub in stainless steel.
- Detergent dispenser with 5 compartments
- 8 signals for automatic liquid dosing, programmable in time and delay.
- 3 water inlets.
- These machines have electronic control of imbalance with frequency inverter, that detects the unbalanced load before spinning. Standard frequency: 50 - 60 Hz.
- New microprocessor EASY TOUCH with touch screen. 26 preset programs.
- Possibility of programming, exporting and importing programs without limit, software updates, through USB port, using USB drive.
- Traceability standard: All washing process (temperatures, water levels) is stored in the washer and can be extracted to a PC by means of a USB drive.
- Wet Cleaning standard in the microprocessor: fully adjustable water levels and washing speed for delicate.
- Optimal loading standard to optimize water and chemicals consumptions.
- LOADING AID feature with water and rotation control for easy loading of the linen.
- CE and GOST approved product.



WED 45/60 ET



WED 120 ET

OPTIONS

- Double drain kit, allow the recovery of the water, with important water savings.
- Bottom cover for washers.
- Relay card with 6 extra dosing signals: total of 14 signals in the machine.
- Tilting system - both forwards and backwards for an easy loading / unloading.
- Weighing System. Weighing sensor system on feet. Not available with tilting system.
- Steam kit to transform an electric or hot water heated machine into steam version. Models WED45 and WED60.
- Double heating electric-steam kit for models WED45 and WED60.
- Water inlet kit for models WED45 and WED60.
- Voltage 230 V III 50/60 Hz.
- Ship voltage for electric models: 440V III 50/60 Hz No neutral.



Easy touch



Inox



Eau chaude et Eau froide



Inverter



3 arrivées d'eau



Charge optimale



Installation et maintenance aisées



Tambour efficace




Wet cleaning



Pesage

TECHNICAL DATA	UNIT.	WED45 ET	WED60 ET	WED120 ET				
DRUM								
Load capacity 1:9 / 1:10	Kg	50/45	67/60	133/120				
Volume	l	450	600	1.200				
Diameter	mm	918	1.048	1.360				
Depth	mm	720	684	840				
GENERAL DETAILS								
Washing speed	r.p.m.	42,5	38	34				
Spining speed	r.p.m.	850	760	680				
G Factor	-	350	350	350				
Maximum force transmitted	KN	13,5 ±3,5	14 ±4,2	39 ±5,25				
Frequency-dynamic force	Hz	14,1	12,66	11,33				
Sound level	dB	70	70	70				
Double drain	-	Opt	Opt	Opt				
Weighing System / Tilting System	-	Opt	Opt	Opt				
DOOR								
Height center door / Height door	mm	1.118/756	1.118/756	1.330/900				
Diameter	mm	560	560	700				
POWER								
Motor	kW	7,5	11	15				
Heating (Electric model)	kW	28,8	36	No				
Max. power (Electric model)	kW	31,3	40	No				
Max. power (steam and hot water)	kW	7,5	11	15				
CONNECTIONS								
		ELECTRICAL	HOT WATER	STEAM	ELECTRICAL	HOT WATER	STEAM	STEAM / HOT WATER
Tension 230V - III + T	N° x mm2 / A	4 x 25 / 80A	4 x 4 / 32A	4 x 2,5 / 20A	4 x 25 / 100A	4 x 6 / 40A	4 x 4 / 32A	4 x 10 / 50A
Tension 400V - III + N + T	N° x mm2 / A	5 x 10 / 50A	5 x 2,5 / 20A	5 x 1,5 / 16A	5 x 16 / 63A	5 x 4 / 25A	5 x 2,5 / 20A	5 x 4 / 32A
Steam inlet (Steam mod.)	inch		3/4"			3/4"		1-1/4"
Maximum steam consumption (Steam mod.)	Kg/h		19			21		26,5
Water inlet	inch		1"			1"		1-1/2"
Water main pressure	Kgs/cm ²		2-4			2-4		2-4
Maximum water consumption*	Lit/h		473			633		1.254
Drain	mm/inch		3"			3"		4"
Drainage capacity	Lit/min		200			200		500
DIMENSIONS / PACKING DIMENSIONS								
Width / Width	mm		1.428/1.600			1.428/1.600		1.780/1.940
Depth / Depth	mm		1.428/1.620			1.428/1.620		1.715/1.980
Height / Height	mm		1.910/2.000			1.910/2.000		2.240/2.280
Net weight / Gross weight	kg		1.350/1.420			1.400/1.520		3.950/4.100

* N°2 Program, 100% load

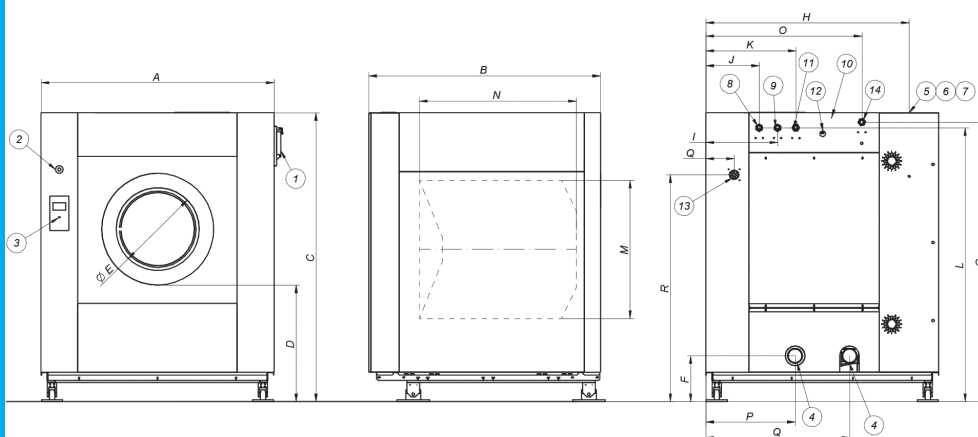

- 01. Soap dispenser
- 02. Emergency stop
- 03. Usb port
- 04. Drain
- 05. Electric connection to liquid soap pumps
- 06. Electrical connection
- 07. Main switch
- 08. Auxiliar water inlet
- 09. Hot water inlet
- 10. Ground connection
- 11. Cold water inlet
- 12. Steam output
- 13. Liquid soap connection
- 14. Steam connection

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
WED45	1.428	1.428	1.910	755	560	295	1.790	1.200	500	360	640	1.790	920	720	1.065	765	975	1.445
WED60	1.428	1.428	1.910	755	560	295	1.790	1.200	500	360	640	1.790	1.050	685	1.065	765	975	1.445
WED120	1.780	1.715	2.240	900	700	335	2.115	1.515	640	500	780	2.115	1.360	840	1.245	735	1.150	1.745