

TUMBLE DRYERS

DX
RANGE

DX 13	DX 16	DX 24
13KG 30LB	16KG 35LB	24KG 55LB



FEATURES

- Controls:
 - Dual Digital Control or OPL Micro
 - Coin operated version: XQ-Control
- Electrical, Gas and Steam heating
- Large door opening for easy loading and unloading
(Ø 57cm,DX13,16, Ø 68cm DX24)
- Galvanized drum
- Axial airflow
- Large lint filter

OPTIONS

- Stainless steel drum
- Stainless steel front panel with black painted door
- Coin operated version
- Reversing drum
- Residual moisture control Sensodry+®
(only with Full OPL Micro):
 - lower energy and utility costs
 - lower linen replacement costs
- SafeTech™ Fire Suppression System



FAST DRYING



EASY
OPERATION




SERVICE
FRIENDLY

senso.dry+


SafeTech™

TYPE		DX13	DX16	DX24
CAPACITY				
Capacity	kg	13	16	24
Drum volume	l	270	350	490
Drum diameter	mm	Ø 673	Ø 762	Ø 838
AIRFLOW				
Airflow	l/s	240	280	330
DRYING AVERAGE				
Gas heating	g/min	267	349	485
Electric heating	g/min	258	340	371
MOTOR				
Fan	kW	0,4	0,4	0,4
Drive	kW	0,2	0,2	0,4
GAS HEATING				
Energy	kW	21,4	26,4	32,8
Energy	kBTU/h	73	90	112
Electrical connection		1×100-120V/50-60Hz, 1-3×200-240V/50-60 Hz 3×440-480V/50-60Hz, 3×380-415V/50-60Hz		
Gas connection	NPT	½"	½"	½"
STEAM HEATING				
High pressure 6,9 bar	kW kBTU/h	24,47 83,5	30,3 103,4	- -
Electrical connection		1×100-120V/50-60Hz, 1-3×200-240V/50-60 Hz 3×440-480V/50-60Hz, 3×380-415V/50-60Hz		
Steam connection	NPT	¾"	¾"	-
ELECTRICAL HEATING				
Energy	kW	21	24	27
Electrical connection		1×200-208V/50-60Hz, 3×200-208V/50-60Hz, 1x 230-240V/50-60Hz, 3x 230-240V/50-60Hz, 3x 380V/50-60Hz, 3x400-415V/50-60Hz, 3x 440V/50-60Hz, 3x 460-480V/50-60Hz		
EXHAUST	Ø /mm	150	200	200
DIMENSIONS				
Size H×W×D	mm	1625×710×1155	1625×800×1155	1700×875×1350
Net weight (E)	kg	150	160	200
Net weight (G,S)	kg	145	155	195
TRANSPORT DATA				
Packed (foil) H×W×D	mm	1720×760×1240	1720×840×1240	1790×900×1450
Gross weight (foil, E)	kg	160	170	220
Gross weight (foil,G,S)	kg	155	165	215
Packed (crate) H×W×D	mm	2210×880×1320	2210×950×1320	2210×1020×1520
Gross weight (crate, E)	kg	220	230	300
Gross weight (crate,G,S)	kg	214	220	295

Side DX 11 13 16 24

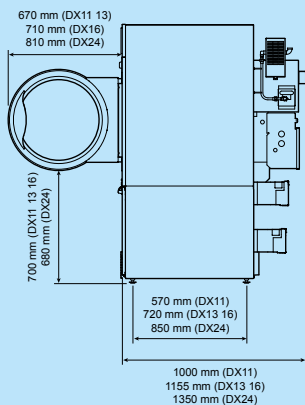

Back DX 11 13 16 24

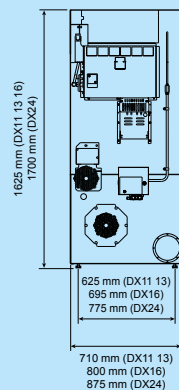

The Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

Primus by Alliance Laundry Systems

